



CanFix Emergency Repair Kit is a complete system for making emergency repairs to a wide variety of pipe materials. CanFix consists of a patented, fiberglass cloth impregnated with water activated resin that sets in minutes with no measuring, mixing, or messy cleanup. Each kit contains a roll of CanFix cloth, a 'two part epoxy' for filling and sealing, a pair of latex gloves, and complete instructions for use.



Approved and used
by the US Navy and
Coast Guard


Applications

- Riser Exhaust
- Leaking Hydraulic Lines
- Water Cooling Hoses & Fluid Lines
- Leaking Steam Lines & Fittings
- Corrosion Protection Coating
- Repair Broken Tool Handles, etc.
- Emergency Repairs to Fuel Lines

Specifications

- Max. Pres. Retained (8 layers applied): 1,000 psi
- Tensile Strength: 24,900 psi
- Flexural Strength: 16,100 psi
- Compression Strength: 26,600 psi
- Dielectric Strength: 16,060 volts

- Heat Resistant: 500°F (intermittent)
- Colour: White or grey
- Setting Time @ 70 Deg. F: 30 min
- Setting Time @ 42 Deg. F: 3 hours
- Setting Time @ 35 Deg. F: 6.5 hours

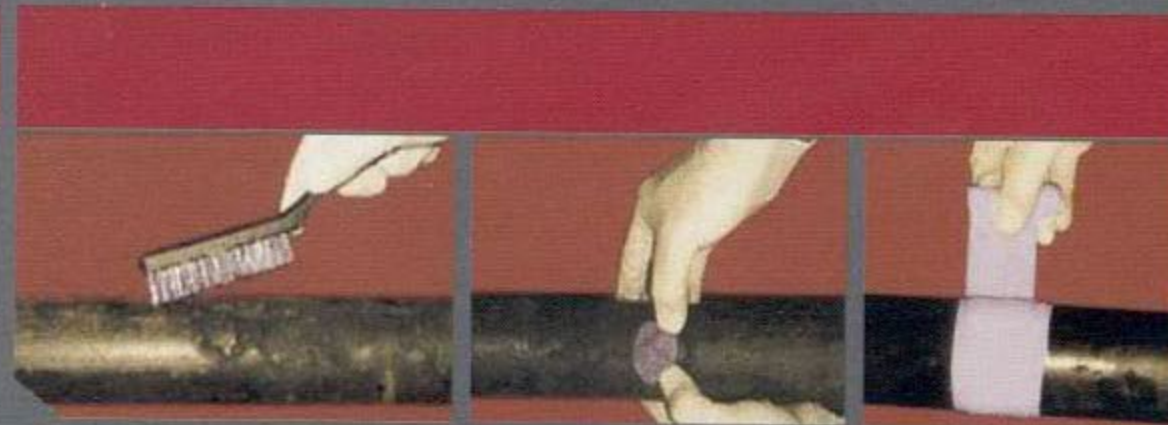

IMPA NO.	PACKAGING
81 23 61	6 packs per box: 2" x 4' for pipe diameter 0.5" - 1"
81 23 65	6 packs per box: 3" x 9' for pipe diameter 1" - 2"
81 23 63	6 packs per box: 4" x 12' for pipe diameter 4" and up

Application Instructions

- 1** Release water pressure if applicable
- 2** Clean and roughen area to be repaired
- 3** Press epoxy into crack or crevice to be repaired
- 4** Wearing enclosed gloves, soak CanFix Tape in temperate water for 20 seconds
- 5** Using entire roll, wrap CanFix approx. 2.0 in. above repair area and continue wrapping approx. 2.0 in. below repair
- 6** Squeeze and mold CanFix in the direction of the wrap, removing excess water and spreading resin until tacky to the touch
- 7** Allow 30 minutes to completely cure (@ 70°F)